


- ▶ Compact and streamline design
- ▶ Individual sheave lubrication lines
- ▶ Each sheave individually lubricated
- ▶ One piece forged alloy clevis

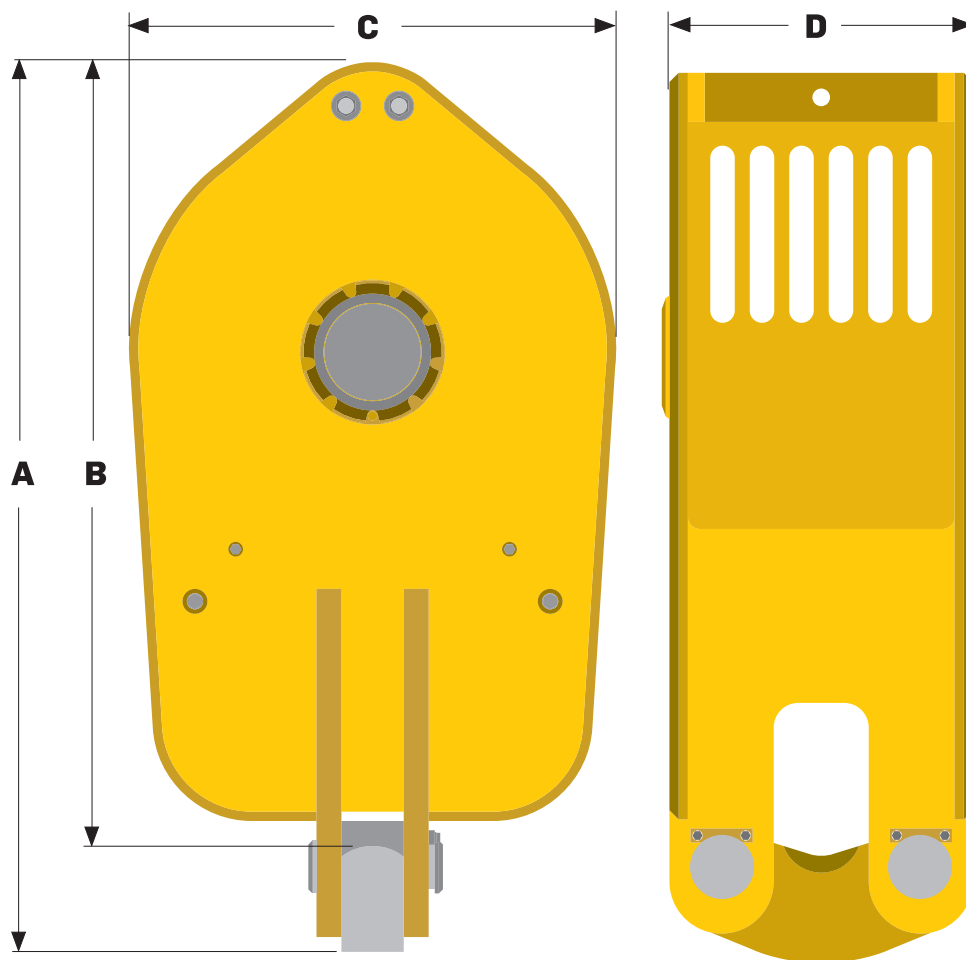

MODEL	A (in./mm.)		B (in./mm.)		C (in./mm.)		D (in./mm.)		Weight (lbs./kg)	
B36E250	69.25	1759	60.25	1530	39	991	25.25	641	5765	2615
B42E350	84.25	2140	73.13	1858	45	1143	26.5	673	10200	4627
B44E350	86.38	2194	73.13	1858	47	1194	26.5	673	8500	3856
B50F400	92.38	2346	81.13	2061	53	1346	29.5	749	11325	5137
B50F500	96	2439	82.5	2096	53	1346	33	838	16000	7258
B60F500	106	2693	92.5	2350	63	1600	33	838	19200	8709
B60G500	106	2693	92.5	2350	63	1600	37	940	21000	9526
B60F650	117.75	2991	104.25	2648	63	1600	34.25	870	20950	9503
B60G650	117.63	2988	104.75	2661	63	1600	38.5	978	22500	10206
B60G750	126	3200	107.5	2731	63	1600	39.5	1003	25650	11635
B60H750	126	3200	107.5	2731	63	1600	43.75	1111	30000	13630
B60H1000	125.13	3178	106.63	2708	63	1600	53.75	1365	32000	14500
B72H1000	139	3531	120.5	3061	75	1905	43.75	1111	34800	15785